

FIX EXPANSION PLUG WITH COLLAR

Easy-to-install plug with collar giving exceptional performance in solid base materials



Product information

Features and benefits

- Flange ensures flush fit to surface.
- Anti-rotation fins prevent spinning during tightening of the screw.
- Engineered grip feature for extra holding power.
- Two-way expansion mechanism provides a strong anchorage in solid base materials.

Applications


- Pictures
- Lighting
- Skirting / Dado railing
- Shelves
- Trunking
- Cable trays
- Electrical fittings
- Letterboxes

Base materials

Approved for use in:


- Concrete
- Solid Brick
- Solid Sand-lime Brick
- Aerated Concrete Block

Installation guide

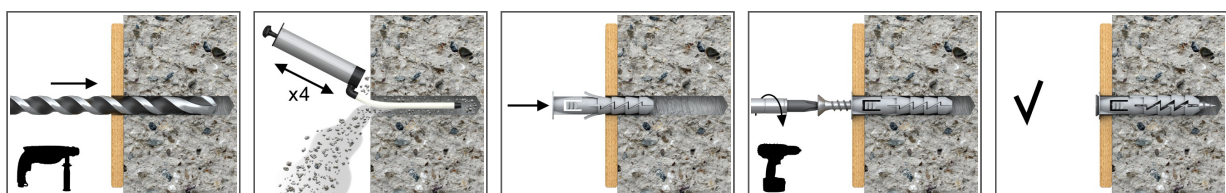

1. Drill a hole of required diameter.
2. Insert FIX plug into hole and tap home.
3. Insert screw of required diameter into plug through fixture and tighten.


Product information

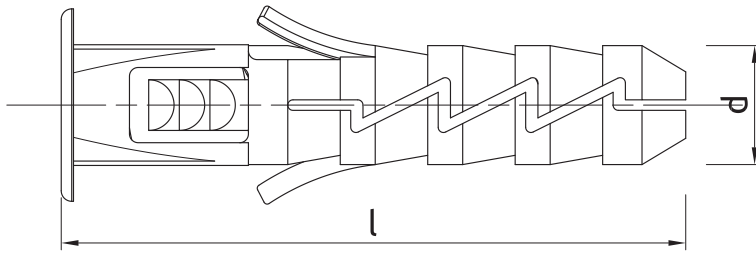

Product dimensions

Size	Product Code	Plug		Screw	Fixture
		Diameter	Length	Diameter	Hole diameter
		d	l	D	d _f
[mm]					
Ø6	FIX-KK-06	6	30	3,5 - 4,0	4,0 - 5,0
Ø8	FIX-KK-08	8	40	4,5 - 5,0	5,0 - 6,0
Ø10	FIX-KK-10	10	50	5,0 - 6,0	6,0 - 7,0
Ø12	FIX-KK-12	12	60	6,0 - 8,0	7,0 - 9,0
Ø14	FIX-KK-14	14	70	10,0	11,0

Installation data

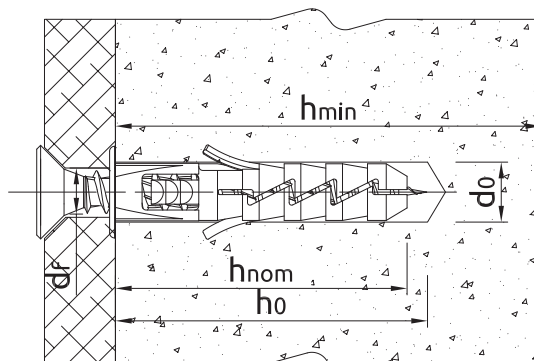

Installation data

Size			Ø6	Ø8	Ø10	Ø12	Ø14
Hole diameter in substrate	d ₀	[mm]	6	8	10	12	14
Min. hole depth in substrate	h ₀	[mm]	40	50	60	70	80
Min. installation depth	h _{nom}	[mm]	30	40	50	60	70
Min. substrate thickness	h _{min}	[mm]	80	80	80	90	105
Min. spacing	s _{min}	[mm]	60	80	100	120	140
Min. edge distance	c _{min}	[mm]	60	80	100	120	140
Fixing diameter	d	[mm]	6	8	10	12	14

Basic performance data

Performance data for single fixing without influence of edge distance and spacing

Substrate	Concrete C20/25 - C50/60	Solid clay brick min 20MPa (eg Mz20/2.0)	Sand-lime solid brick	Aerated concrete 600 Mark V	Hollow lightweight concrete block
CHARACTERISTIC LOAD					
TENSION LOAD N _{Rk}					
Ø6, Embedment depth 30mm	[kN]	0.15	0.15	0.30	0.40
Ø8, Embedment depth 40mm	[kN]	0.50	0.50	1.20	0.75
Ø10, Embedment depth 50mm	[kN]	0.40	0.40	0.60	0.90
Ø12, Embedment depth 60mm	[kN]	1.20	1.20	3.00	2.00
Ø14, Embedment depth 70mm	[kN]	1.20	1.20	1.20	1.15

Basic performance data

Substrate		Concrete C20/25 - C50/60	Solid clay brick min 20MPa (eg Mz20/2.0)	Sand-lime solid brick	Aerated concrete 600 Mark V	Hollow lightweight concrete block
SHEAR LOAD V_{Rk}						
Ø6, Embedment depth 30mm	[kN]	0.15	0.15	0.30	0.40	0.40
Ø8, Embedment depth 40mm	[kN]	0.50	0.50	1.20	0.75	-
Ø10, Embedment depth 50mm	[kN]	0.40	0.40	0.60	0.90	-
Ø12, Embedment depth 60mm	[kN]	1.20	1.20	3.00	2.00	-
Ø14, Embedment depth 70mm	[kN]	1.20	1.20	1.20	1.15	-
DESIGN LOAD						
TENSION LOAD N_{Rd}						
Ø6, Embedment depth 30mm	[kN]	0.08	0.06	0.12	0.20	0.16
Ø8, Embedment depth 40mm	[kN]	0.28	0.20	0.48	0.38	-
Ø10, Embedment depth 50mm	[kN]	0.22	0.16	0.24	0.45	-
Ø12, Embedment depth 60mm	[kN]	0.67	0.48	1.20	1.00	-
Ø14, Embedment depth 70mm	[kN]	0.67	0.48	0.48	0.58	-
SHEAR LOAD V_{Rd}						
Ø6, Embedment depth 30mm	[kN]	0.12	0.12	0.24	0.32	0.32
Ø8, Embedment depth 40mm	[kN]	0.40	0.40	0.96	0.60	-
Ø10, Embedment depth 50mm	[kN]	0.32	0.32	0.48	0.72	-
Ø12, Embedment depth 60mm	[kN]	0.96	0.96	2.40	1.60	-
Ø14, Embedment depth 70mm	[kN]	0.96	0.96	0.96	0.92	-
RECOMMENDED LOAD						
TENSION LOAD N_{rec}						
Ø6, Embedment depth 30mm	[kN]	0.06	0.04	0.09	0.14	0.11
Ø8, Embedment depth 40mm	[kN]	0.20	0.14	0.34	0.27	-
Ø10, Embedment depth 50mm	[kN]	0.16	0.11	0.17	0.32	-
Ø12, Embedment depth 60mm	[kN]	0.48	0.34	0.86	0.71	-
Ø14, Embedment depth 70mm	[kN]	0.48	0.34	0.34	0.41	-
SHEAR LOAD V_{rec}						
Ø6, Embedment depth 30mm	[kN]	0.09	0.09	0.17	0.23	23.00
Ø8, Embedment depth 40mm	[kN]	0.29	0.29	0.69	0.43	-
Ø10, Embedment depth 50mm	[kN]	0.23	0.23	0.34	0.51	-
Ø12, Embedment depth 60mm	[kN]	0.69	0.69	1.71	1.14	-
Ø14, Embedment depth 70mm	[kN]	0.69	0.69	0.69	0.66	-

Product commercial data

Product Code	Plug	Quantity [pcs]			Weight [kg]			Bar Codes
	Diameter [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
FIX-KK-06	6	250	8000	192000	0.15	4.8	145.2	5906675120614
FIX-KK-08	8	200	2400	57600	0.24	2.9	99.1	5906675120638
FIX-KK-10	10	100	1600	38400	0.24	3.8	122.2	5906675120645
FIX-KK-12	12	50	800	19200	0.22	3.5	114.5	5906675120652
FIX-KK-14	14	25	600	19200	0.14	3.4	137.5	5906675120669